






Replacement of Consumables

● Be sure to observe the following items for replacement of consumables.

DANGER

 <p>PERSON WHO FULLY UNDERSTANDING THIS MANUAL MAY PERFORM REPLACEMENT OF CONSUMABLES. ※ Otherwise, electric shock, injury, trouble, or damage may occur.</p>	 <p>BE SURE TO TURN OFF THE POWER, STOP SUPPLY OF COMPRESSED AIR, AND RELEASE THE RESIDUAL PRESSURE BEFORE REPLACEMENT OF CONSUMABLES. ※ Otherwise, electric shock or injury may occur.</p>
 <p>DO NOT MODIFY THE SE-500. ※ Otherwise, electric shock, injury, trouble, or damage may occur.</p>	

WARNING

 <p>WHEN MORE THAN ONE PERSON WORKS, CALL TO EACH OTHER. ※ Otherwise, electric shock or injury may occur.</p>	 <p>INSTALL THE REMOVED COVERS AGAIN AS THEY WERE. ※ Otherwise, electric shock or injury may occur.</p>
---	---


CAUTION

 <p>DO NOT CLIMB ON OR MAKE IMPACT ON THE SE-500. ※ Otherwise, trouble or damage may occur.</p>


Replace of screen

1 Remove the outlet hopper cover.

2 Loose the Bolt M8 (8pieces), remove the outlet part to front side.

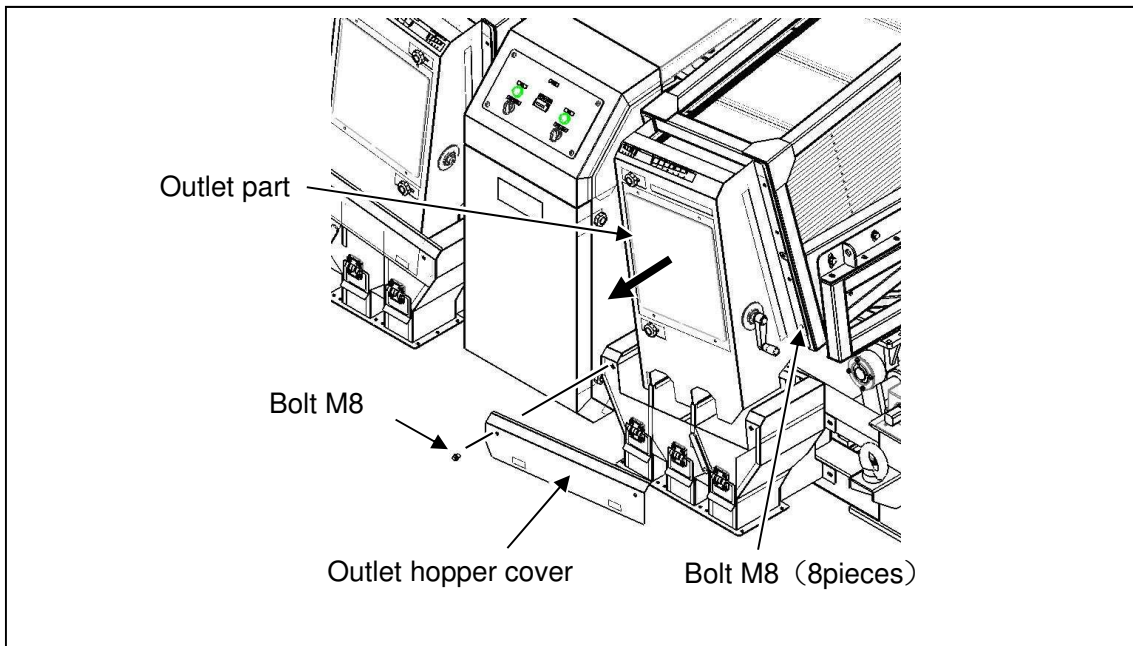

3 Pull the screen to front side. From the other side (feed part) is also available.

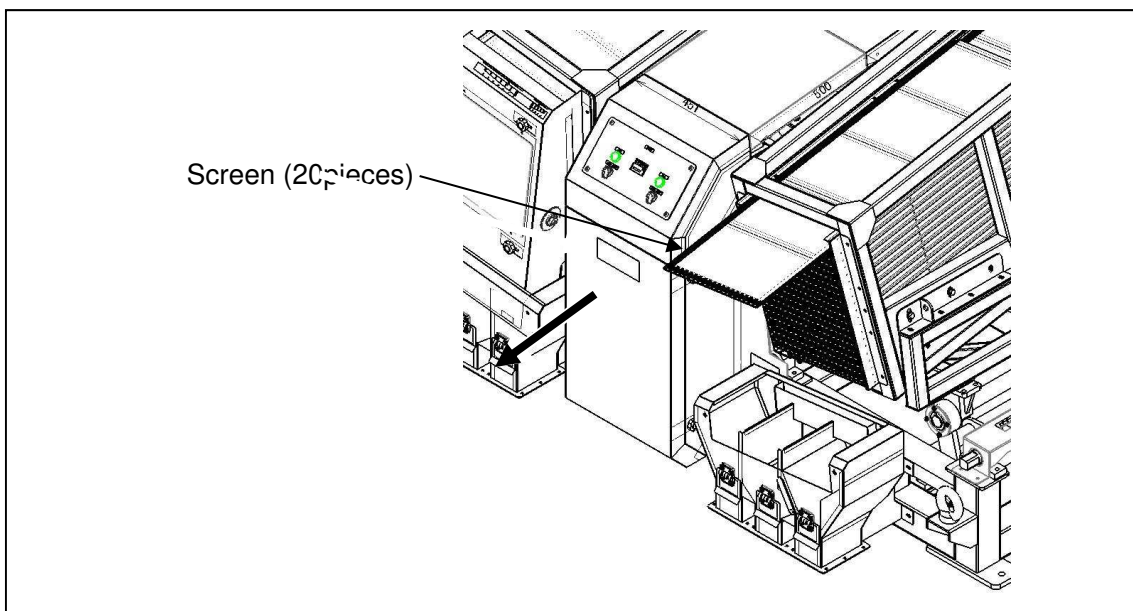

4

Insert the new screens with opposite procedure.

Note the reentrant direction of screen.

